


Elite Smooth Coating

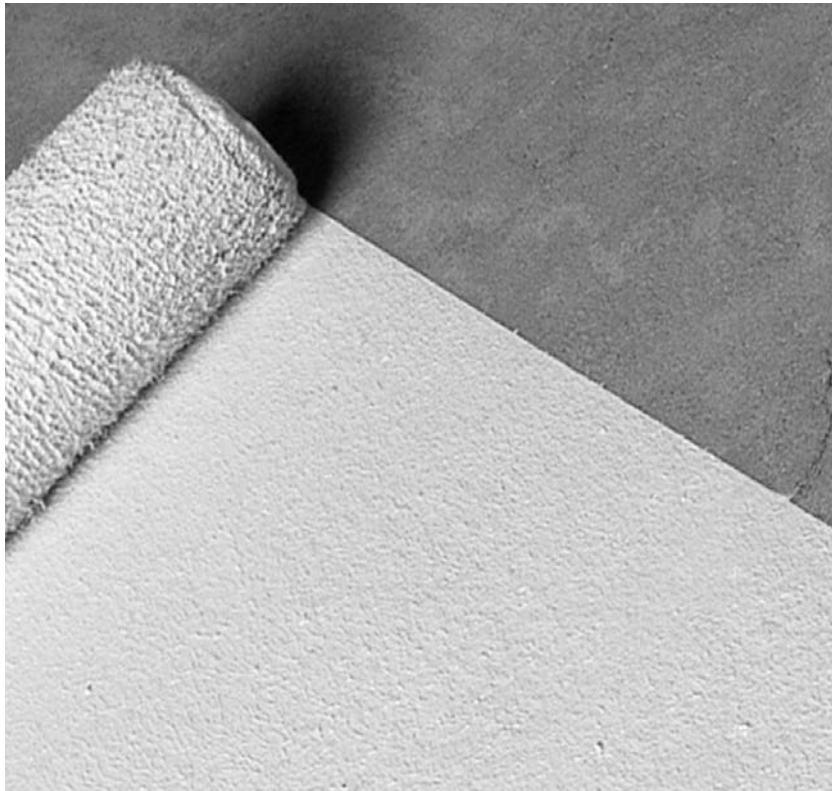

DESCRIPTION:

- 100 percent acrylic elastomeric non-textured coating
- Highly flexible: can bridge existing hairline cracks
- Integrally colored with high quality pigments

USES:

Exterior coating for:

- Masonry renovation
- Concrete and stucco renovation
- Over acrylic-based finishes for renovation

COMPOSITION:

- Binder base: 100 percent acrylic elastomeric polymer with surface-hardening property
- Water base: VOC compliant
- Pigment base: Titanium Dioxide
- Solids:
 - By weight: 68 percent
 - By volume: 54 percent
- Color: White or tinted to desired color
- Appearance: Flat non-gloss smooth finish

PHYSICAL PROPERTIES:

- Adhesion: Excellent adhesion to compatible, properly prepared surfaces. Adhesion to concrete (ASTM D 4541): 150 psi (1 MPa)
- Water-Vapor Transmission: Does not create a vapor retarder (ASTM E 96): greater than 12 Perms
- Mandrel Bend 1/8 in. (ASTM C 711-71): Passes at -30°F (-22°C)
- Tensile Strength: (ASTM D 412): 160 psi
- Elongation: 360% at 70°F (21°C)
360% at 0°F (-18°C)

Elastomeric

COVERAGE:

Depending on the condition of the substrate and method of application, approximate coverages are:

One coat: 10 mils (0.25mm) wet or 6 mils (0.15mm) dry.

- Porous surfaces: approximately 250 - 375 sq. ft. (23 - 35m²) /pail
- Smooth, filled surfaces: approximately 700 - 800 sq. ft. (65 - 74m²) /pail

CONTAINER:

55 lb (25.4 kg) net weight in plastic pails.

- Storage: Protect from sun and freezing at all times
 - Do not stack pails more than 3 pails high
- Shelf Life: One year if protected from sun and freezing

DRYING TIME:

Approximately 1-4 hours depending upon temperature, humidity and substrate. Can be recoated after 8 hours in dry weather. Allow minimum 5 days curing before washing surface.

CLEANUP:

Water soluble prior to drying. Clean tools and containers with water prior to drying.

SURFACE PREPARATION:

- Remove surface contaminants such as dust or dirt without damaging the substrate
- For previously painted surfaces, all loose and chalking paint must be removed, and glossy surfaces dulled
- New concrete and masonry must be clean and cured a minimum of 28 days
- Check concrete surfaces for alkalinity and treat. Any form-release agents or bond breakers must be removed
- Uneven concrete or masonry can be leveled with either Flex or Prime-A-Flex Base Coat or other suitable, compatible product
- For interior drywall, prepare as for painting
- Prime with Surewall Pre-Coat Acrylic Primer
- For application of Surewall Pre-Coat Acrylic Primer, refer to the Product Data Sheet
- For additional options, contact Surewall Technical Services Department

MIXING:

- Use clean equipment for mixing and preparation.
- Stir Elite Smooth Coating to a uniform consistency. Avoid creating air bubbles or foam.
- For some spray applications it may be necessary to thin Elite Smooth Coating slightly. Use only clean potable water and sparingly: never more than 16 oz (.48L) per pail since thinning affects color density and film thickness.

APPLICATION:

- Read the entire label before using this product
- Elite Smooth Coating exhibits good surface coverage in single applications. However, for most uncoated, unprimed surfaces of concrete, masonry or stucco, two coats of Elite Smooth Coating are usually required to obtain adequate hiding and performance.
- Elite Smooth Coating is easily applied with brush, roller or suitable spray equipment. Contact Surewall Technical Services for recommended spray equipment
- Apply Elite Smooth Coating as packaged. If necessary, add small amounts of clean potable water to adjust workability (See above mixing).
- Before starting to paint, dampen brush or roller. Use roller or brush designed for applying latex paints.

LIMITATIONS:

- Ambient and surface temperatures must be 40°F (4°C) or higher during application and drying time. Provide supplemental heat and protection from precipitation as needed.
- Use only on surfaces that are sound, clean, dry, and free from any residue which may affect the ability of the Elite Smooth Coating to bond to the surface.
- Avoid application in direct sunlight in hot weather.